

RUGGED ELECTRONIC PACKAGING



Customizable Features:

1. Removable, Packaged 2.5" SATA Solid State Drive


- ▶ Internal drive may be selected to meet program requirements
- ▶ Environmentally sealed enclosure to protect against—rapid decompression, EMI, humidity, dust, salt fog, immersion and condensation
- ▶ Captive thumb screws for docking. Wedge-locks available upon request.
- ▶ Connector rated for 100,000 insertion cycles
- ▶ Hot swappable
- ▶ Available encryption, secure erase, destructive erase, extended temperature and/or power protection options

2. 3.5" Half Height Docking Bay for On-Vehicle Integration

- ▶ Available with Mini Mil-Circular Connectors or commercial SATA connector
- ▶ SATA interface. Other interfaces available upon request.
- ▶ +5VDC power. +28VDC option available
- ▶ EMI filter options

3. Desktop Docking Bay for Off-Vehicle Data Downloading

- ▶ SATA interface
Power supply included

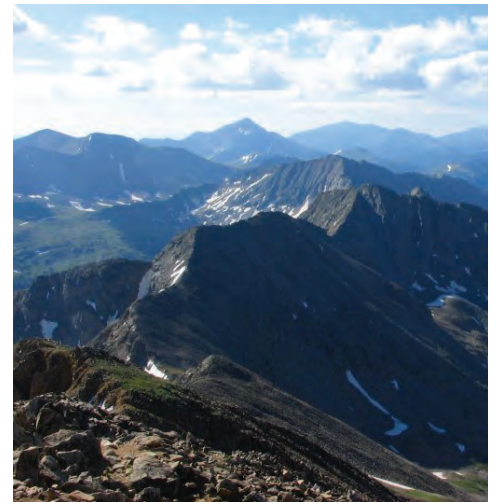

MOUNTAIN SECURE SYSTEMS
RUGGED & WIRELESS SOLUTIONS
RUGGEDIZED ELECTRONICS TO OUTLAST HARSH ENVIRONMENTS

Sawatch Removable, Sealed, SATA 2.5" | 3.5" Solid State Drive

The Sawatch is a removable, sealed, rugged SATA memory device containing a 2.5" solid state drive that mates with a 3.5" docking bay.

Mountain Secure Systems (MSS) packages COTS electronics that incorporate sealed enclosures, removability, EMI/EMC shielding, extended temperature range, firmware control, conformal coating, and other techniques to meet rugged commercial and military standards, including program-specific requirements. By listening to and working closely with our customers, as well as building strong relationships with OEMs and distributors, MSS provides the most reliable rugged electronics in the marketplace. Simply put: No one can match MSS's meticulous attention to detail and proven track record of delivering world-class performance in harsh, demanding environments.


| SPECIFICATIONS: | | SOLID STATE DRIVE | |
|--|---------------------------|-------------------|-------------------|
| Capacity | | Selectable* | |
| Drive Interface | | SATA 2 | |
| Read Performance | | 250 MB Sec SATA | |
| Write Performance | | 200 MB Sec SATA* | |
| Input Voltage | | +5 Volts | |
| Temperature (°C) | Operating | Commercial | -20 to +75* |
| | | Extended | -40 to +80* |
| | Non-Operating | | -45 to +90* |
| Shock (Gs) | MIL-STD-810, RTCA/DO-160D | Operating | 30 @ 11ms |
| Vibration (Gs) | MIL-STD-810, RTCA/DO-160D | | 10 Grms Random |
| Humidity | | | 0% to 100% |
| Fungus Resistance (MIL-STD-810, 508.5) | | | Inert |
| EMI ESD | | | EN61000-4-2 A 8kV |

*MSS leverages the best data storage technologies available on the commercial market. Our expertise is properly ruggedizing, packaging, and integrating the memory to meet your program requirements. While we have close relationships with many of the OEM manufacturers, we are always open to utilizing your SSD choice or recommending the proper drive for your application. Capacity, MLC/SLC, speed, operating temperature and other performance characteristics may be dependent on drive selection.

| PHYSICAL: | | SOLID STATE DRIVE | |
|------------|--|-------------------------|--|
| Dimensions | | 1.02"H x 4.0"W x 5.39"D | |
| Weight* | | 1.2 lbs | |

*Depends on SSD selected.

SAWATCH VME DOCKING BAY AND DRIVE

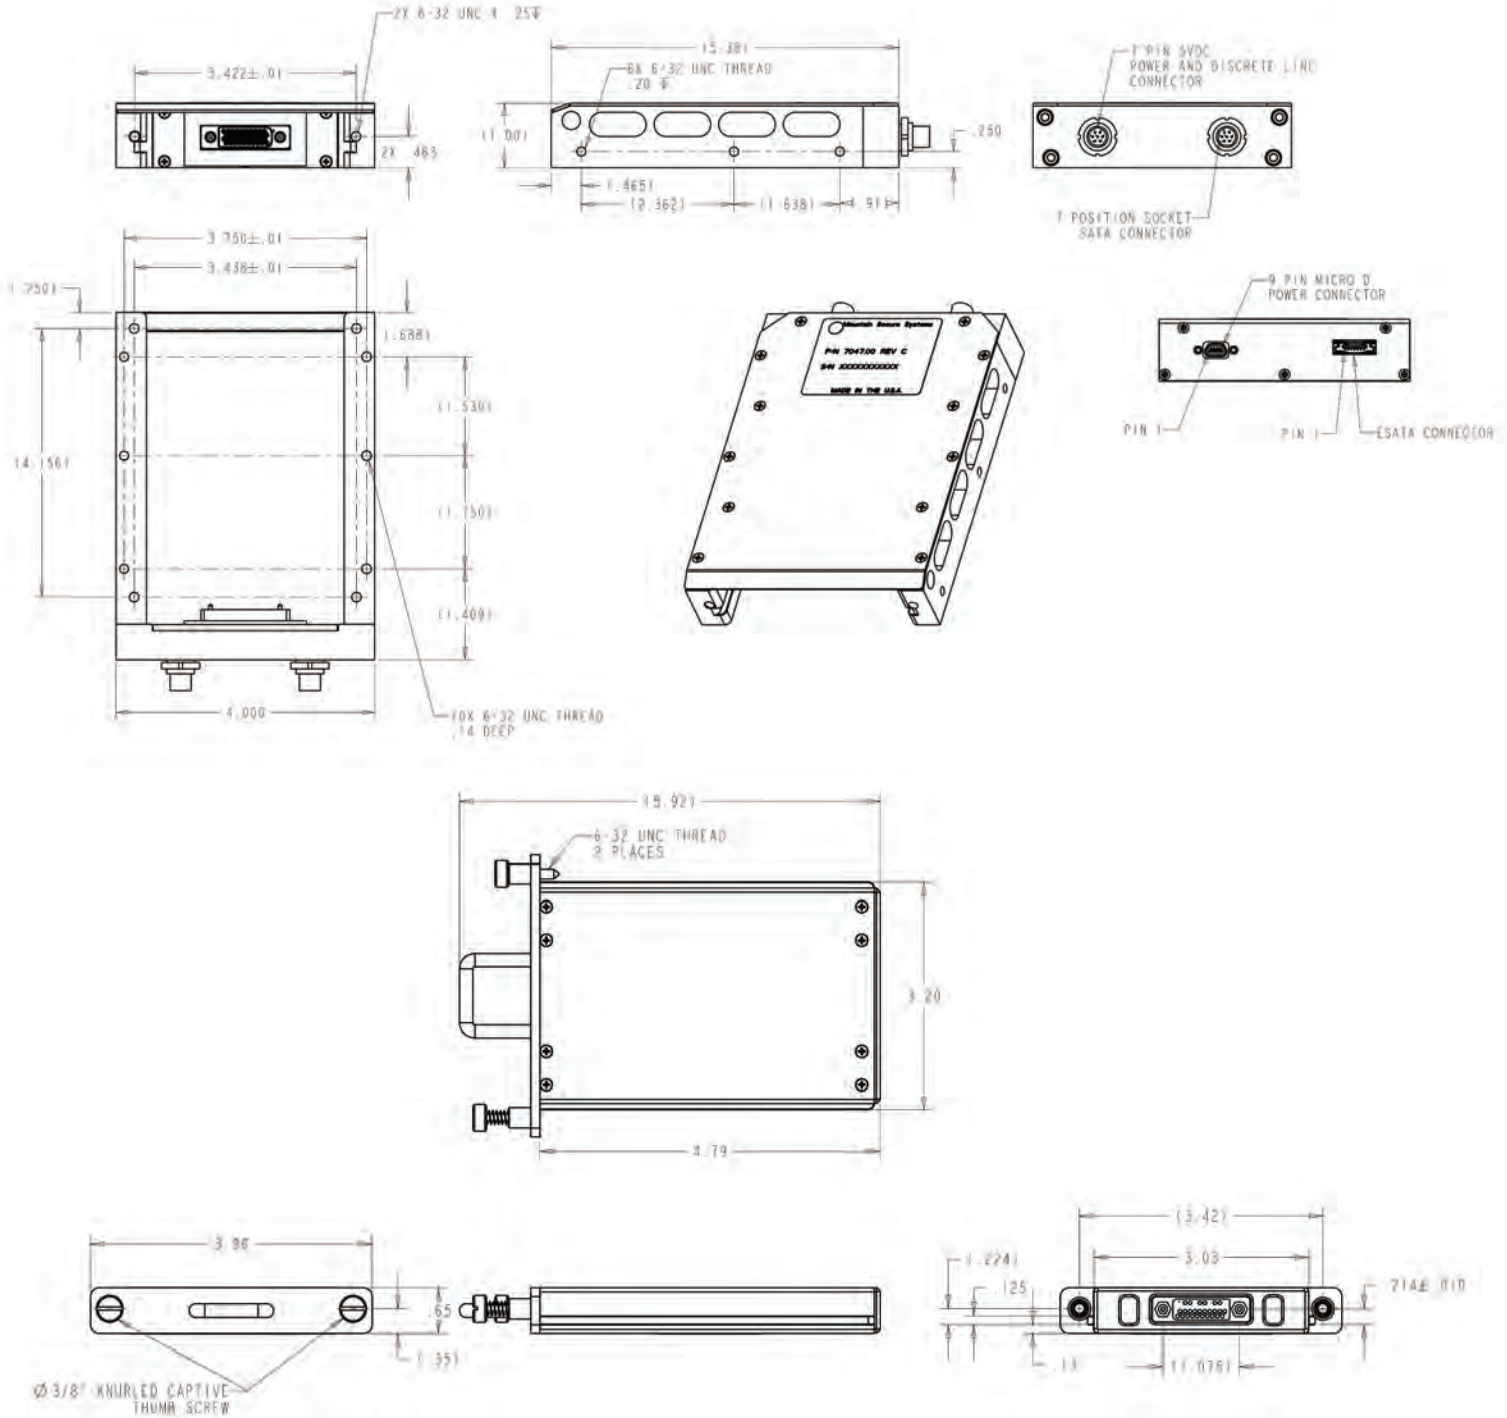

©2014 Mountain Secure Systems is a subsidiary of Phillips Service Industries

1350 Kansas Avenue
Longmont, Colorado 80501-6545
888.884.9344

MountainSecureSystems.com



MADE IN THE USA

CAGE Code: O9FR8
9001:2008
AS9100B | J-STD-001

MSS-15-104 8/29/2014